






未注公差/General tolerances(mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

REV	ECN	DESCRIPTION	DRFT	DATE

DB212TV — 5.0 — XXP — C

(Series No.) (Pitch) (Poles)

(Color):GN:(Green), BK:(Black), BU:(Blue), RD:(Red), GY:(Gray)
OG:(Orange), WT:(White), YL:(Yellow), CR:(Clear)

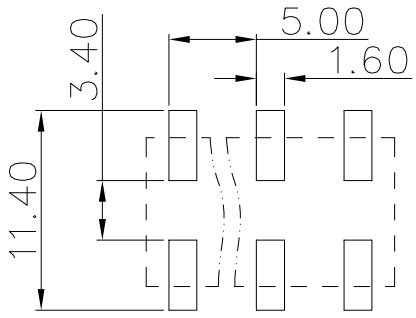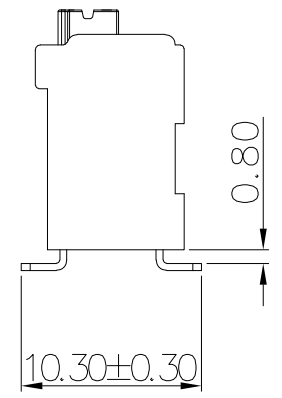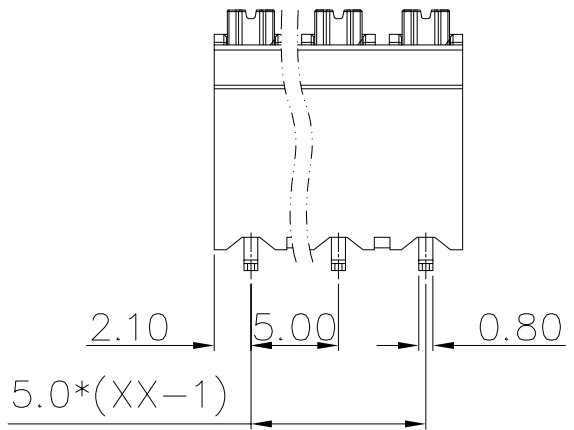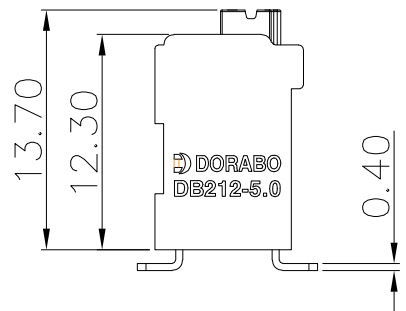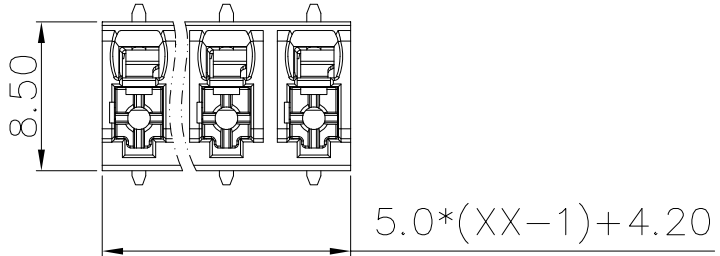

PCB LAYOUT

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/12	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	250/17.5	320/17.5	500/17.5
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		4.0	
螺丝扭矩/Torque Tightening(N·m/Lb.in)		/	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~1.5/26~16	
间距/Pitch(mm)/线数范围/Poles		5.0/XX=02~24P	
剥线长度/Stripping length(mm)		8~9	
使用温度范围/Operating temperature(°C)		-40~+130	
符合RoHS环保要求/Conform to RoHS		Yes	

Spring	Stainless Steel	/
Conductor	Copper alloy	Sn Plated
Button	PA10T	UL94V-0
Insulator	PA10T	UL94V-0
NAME OF PART	MATERIAL	NOTES

MAT NO.:	/
STATUS:	/
APPD:	MARK 2024.10.25
CHKD:	MARK 2024.10.25
DRFT:	MARK 2024.10.25
SIZE:	A4

宁波地博电气有限公司 NINGBO DORABO ELECTRICAL CO., LTD			
NAME: DB212TV-5.0-XXP-BK			
DRAWING NO.:		REV	MO
TYPE: CUSTOMER_DRAWING		SCALE:	SHEET 1/1